


**INMR INOX**

**FLOAT  
LEVEL  
SWITCH**

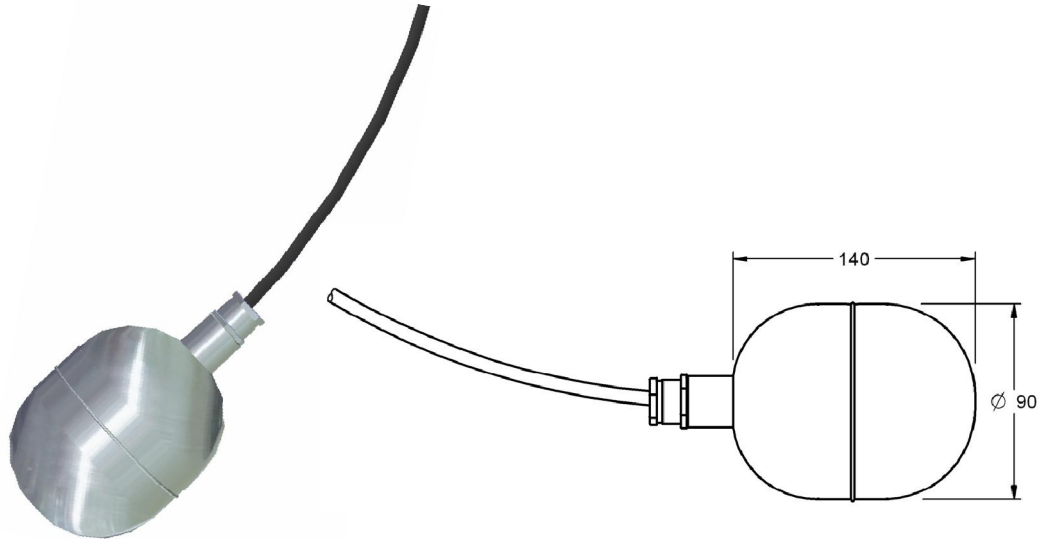

Funtion	Control of maximum or minimum level when filling or emptying.
Application	Chemical products and liquids with temperature.
Attachment	By cable.
Float material	SS AISI316 (1.4401)
Cable gland material	SS AISI316 (1.4401)
Electrical connection	Silicone wire, 3 x 1,5 mm <sup>2</sup> (high flexibility).
Cable lenght	3-6-10 m (Optional other dimensions)
Contact type	Micro-switch SPDT.
Maximum voltage	250 VAC
Maximum current	5A / 250VAC
Operat. temperature	0,7 g/cm <sup>3</sup>
Dimensions	+100 °C
Weight without cable (gr)	Ø90 x 140 mm.
Protection	320
Installation examples	IP68

**Microlectra bv.**  
 Augustapolder 12.  
 2992 SR Barendrecht  
 The Netherlands  
 www.microlectra.com  
 info@microlectra.nl

