


## IMN CCM INOX

### MAGNETIC LEVEL SWITCH

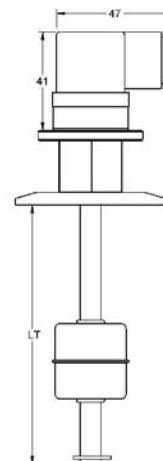

<b>General</b>	Operating principle	The IMN level magnetic sensors are based on the action of a reed switch located inside the tube, which is activated by a magnet housed inside the float and moves due to the thrust of the liquid.	
	Application	<ul style="list-style-type: none"> <li>· For the detection of one or more points in liquid level.</li> <li>· Used in maneuvers for filling, emptying, overflow alarm, etc.</li> </ul>	
	Fabrication	Are customized to suit the installation conditions.	
<b>Housing</b>	Electrical connection	DIN43650 connector	
	Protection	IP 65	
	Temperature (Ta)	-20..+90 °C	
	Cable gland	PG 9	
	Ø Electrical hose	6.8 mm	
<b>Body</b>	Guide tube and stops	SS AISI316 (1.4401). Ø8 mm	
	Length	50..3500 mm	
	Temperature	-40..+125 °C	
	Mounting position	Vertical, ±15°	
<b>Process connection</b>	Flange	1"	1"1/2
	Material	SS AISI316 (1.4401)	
	d (mm)	50,4	
	Thickness (LCP) (mm)	6,5	
<b>Floats</b>	Model	<b>FCI601M09</b>	
	Material	SS AISI316L (1.4404)	
	Dimension (mm)	Ø 29x32	
	Pressure (kg/cm <sup>2</sup> )	15	
	Density (g/cm <sup>3</sup> )	e > 0,71	
	FS / FH (mm)	9,3 / 22,7	
<b>Contacts</b>	Nr. of contacts	1..3	
	Class	NO: 40 WVA / 230 VAC -2A NC-NO/NC: 20 WVA / 150 VAC -1A	
	Distance between them	> 40 mm	
	<b>Protection</b>		
	Insulated	Filled with epoxy resin	

### How to determine the sensor settings

Determine the total length according to the characteristics of the shell and the liquid level to be controlled.

According to the maneuver you wish to perform, determine the amount, location and type of contacts. Use the table below to define these characteristics.

**Contacts:** To set the type of contact (NO, NC, NONC) should be without the presence of the float. For example, if you want the lower end of the sensor contact opens when the tank runs out of fluid, seek an NC contact for the position.


**Direction of action** (↑ ↓): Set the direction of action of the float (the filling or emptying) allows more precise adjustment of the position of the contacts to the point of desired performance.

**Electrical connection:** If not otherwise specified explicitly, provide a common connection to all the contacts and an active connection for each of them, according to the diagram below.

**Additional floats:** The sensor comes equipped by default with a single float, the lower stop and if required, the upper stop. Can request as many additional floats as many contacts as necessary.

**Conditions of work:** Check that the conditions of pressure, temperature and density of your system match those offered by the model chosen. If you have questions regarding the behavior of materials in contact with the liquid you want to control, see chemical resistance chart on our website.

Apart from the possibilities listed here, there are others such as other floats, various electrical connections, etc. For any of these combinations refer to our document, "Connections and schema IMN" section in our website.

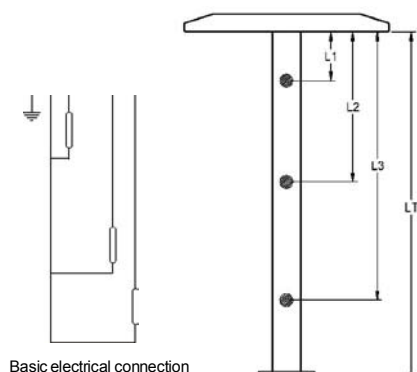

Basic electrical connection

	mm	NO	NC	NONC	↑	↓	Stop
L1							
L2							
L3							
LT							

Use this document to define the data of sensor and attach it at the time of ordering. Specify in mm. total length of the sensor.

Specify in mm. the position of each of the contacts used in your application. Place an "X" the type and direction of action of each contact.

In the case of using additional floats, mark an "X" between what contacts should be placed caps separators. In the composition table references check boxes next to the selected features.


REFERENCE	PROCESS	FLOAT	TOTAL LENGTH	Nr. CONTACTS	Nr. FLOATS
<b>IMN CCM INOX</b>	<input type="checkbox"/> P44 1" <input type="checkbox"/> P45 1"1/2	<input type="checkbox"/> <b>F13</b> FCI601M09	<b>L</b> 50..3500 mm	<input type="checkbox"/> <b>C1</b> 1 contact <input type="checkbox"/> <b>C2</b> 2 contacts <input type="checkbox"/> <b>C3</b> 3 contacts	<input type="checkbox"/> <b>N1</b> 1 float <input type="checkbox"/> <b>N2</b> 2 floats

To compose a reference, select an option from each of the columns. Example: **IMN CCM INOX P44 F13 L500 C1 N1**


Installations advise	Installation in areas with turbulence
<p>If the tank is metal walls, the probe will separate from them at least 100 mm.</p> <p>The maximum slope should be ±15°</p>	<p>Place the sensor as far as possible from areas of turbulence.</p> <p>Still pipe. Protects the race of the float of the turbulence.</p> <p>Separating wall or discouragement.</p> <p>PSIA, DSIA relay: Differential control of max. and min. by timing.</p>

ELECTRICAL CONNECTION EXAMPLES


1 CONTACT

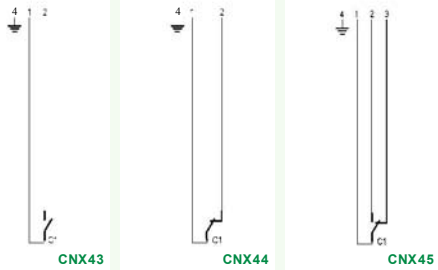

2 CONTACTS

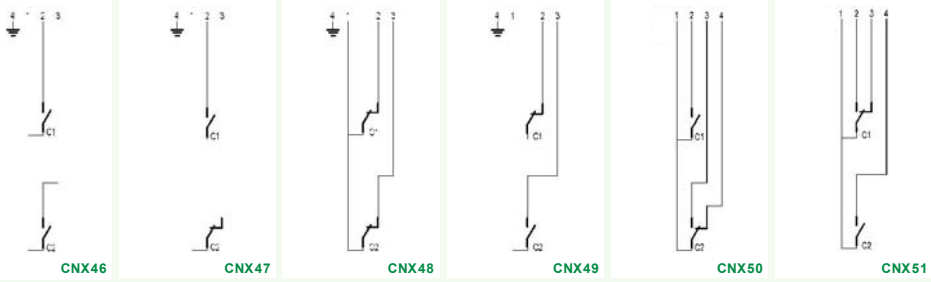


3 CONTACTS

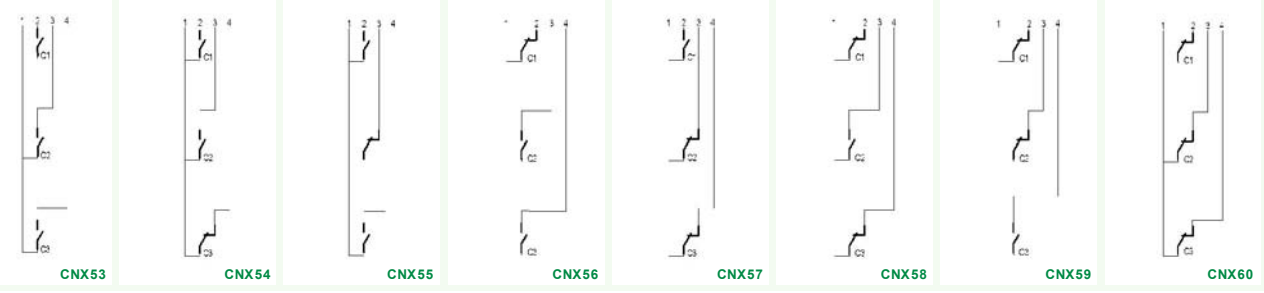


EXAMPLES TO APPLICATION


CONTROL TO ONE MAXIMUM OR MINIMUM LEVEL

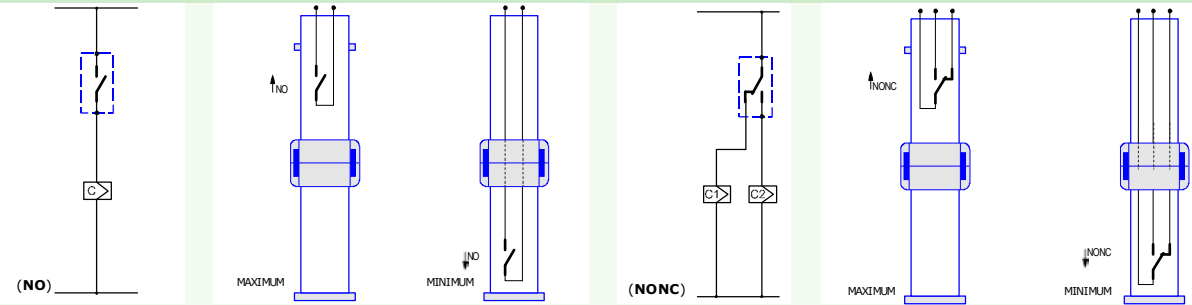

START-STOP WITH INTERLOCKING

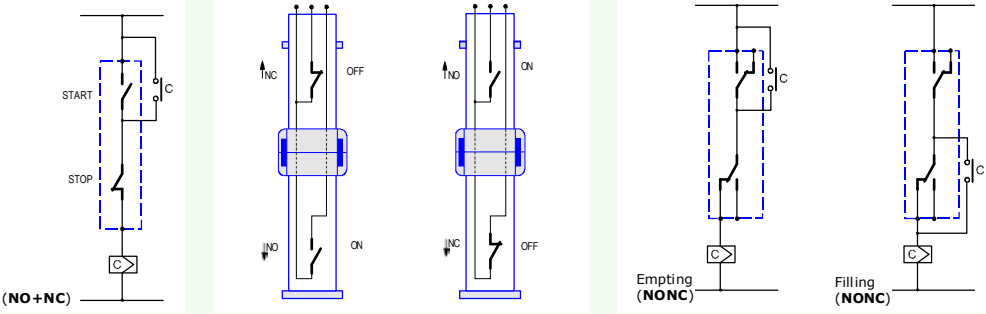

START-STOP EMPTING + ALARM TO MINIMUM LEVEL

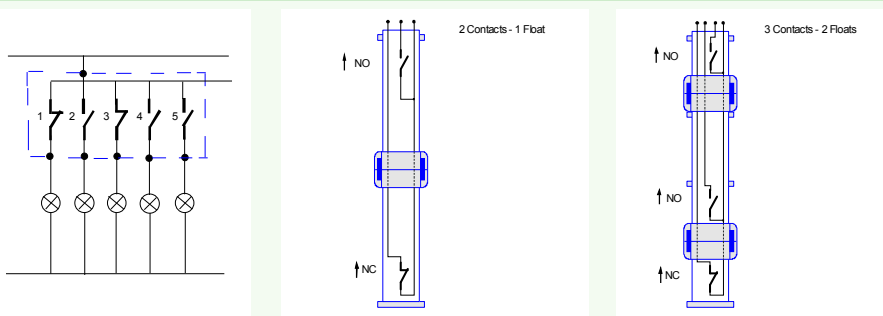

Microlectra bv.  
 Augustapolder 12.  
 2992 SR Barendrecht  
 The Netherlands  
 www.microlectra.com  
 info@microlectra.nl